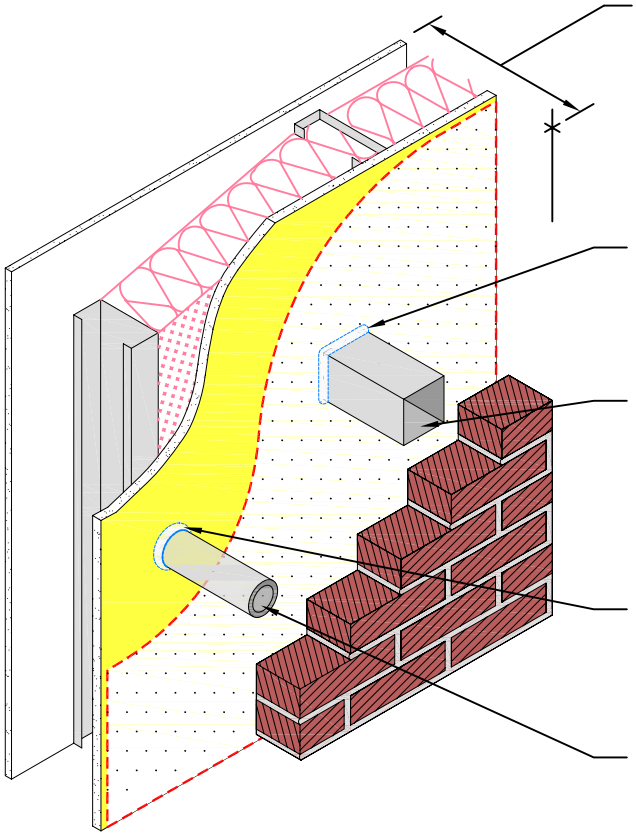

TYPICAL WALL
INTERIOR GYPSUM BOARD
STEEL STUDS W/BATT INSULATION
EXTERIOR GYPSUM BOARD
DUPONT™ TYVEK® FLUID APPLIED WB
AIR SPACE
BRICK VENEER

DUPONT™ TYVEK® FLUID APPLIED FLASHING AND JOINT COMPOUND, AFTER WB
(FILLET BEAD, 1/2" ONTO EACH SURFACE) *

DUCT PENETRATION

DUPONT™ TYVEK® FLUID APPLIED FLASHING AND JOINT COMPOUND, BEFORE WB
(FILLET BEAD, 1/2" ONTO EACH SURFACE) *

PIPE PENETRATION

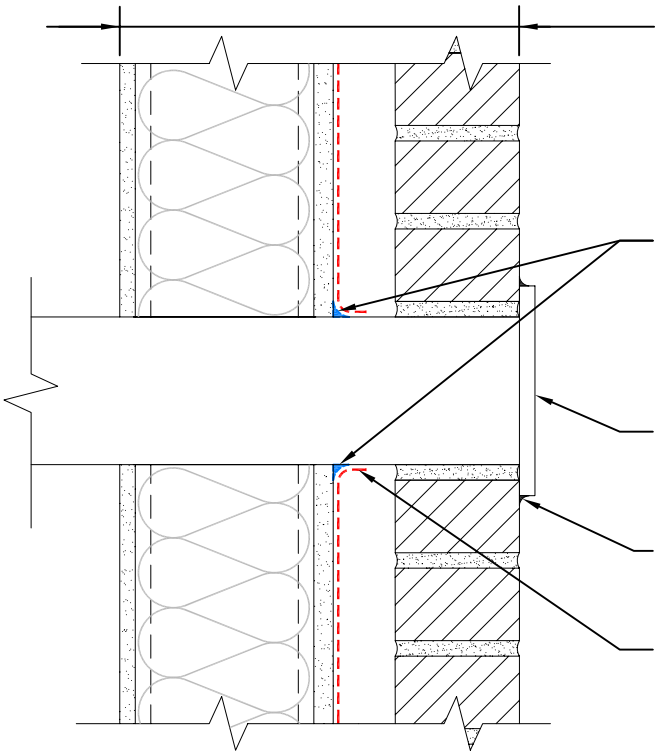

TYPICAL WALL
INTERIOR GYPSUM BOARD
STEEL STUDS W/BATT INSULATION
EXTERIOR GYPSUM BOARD
DUPONT™ TYVEK® FLUID APPLIED WB
AIR SPACE
BRICK VENEER

DUPONT™ TYVEK® FLUID APPLIED FLASHING AND JOINT COMPOUND
(FILLET BEAD, 1/2" ONTO EACH SURFACE) *

PENETRATION

SEALANT
BY OTHERS

DUPONT™ TYVEK® FLUID APPLIED WB
OVERLAPPED ONTO PENETRATION

NOTE
1) INTERIOR VAPOR RETARDER MAY BE REQUIRED IN SOME REGIONS.
2) THIS INFORMATION IS PROVIDED BY DUPONT AS REFERENCE ONLY; PLEASE CONSULT LOCAL BUILDING CODES, REGULATIONS AND LAWS TO DETERMINE THE APPROPRIATE CONSTRUCTION METHODS AND MATERIALS NEEDED.

* DUPONT™ SEALANT FOR TYVEK® FLUID APPLIED SYSTEM OR DUPONT™ TYVEK® FLUID APPLIED FLASHING AND JOINT COMPOUND MAY BE USED.

SCALE: NOT TO SCALE
REVISION DATE: 4/28/10
DRAWING: FA-B-202

PENETRATION DETAIL

BRICK VENEER / STEEL STUD WALL

DUPONT
Tyvek
FLUID APPLIED WB