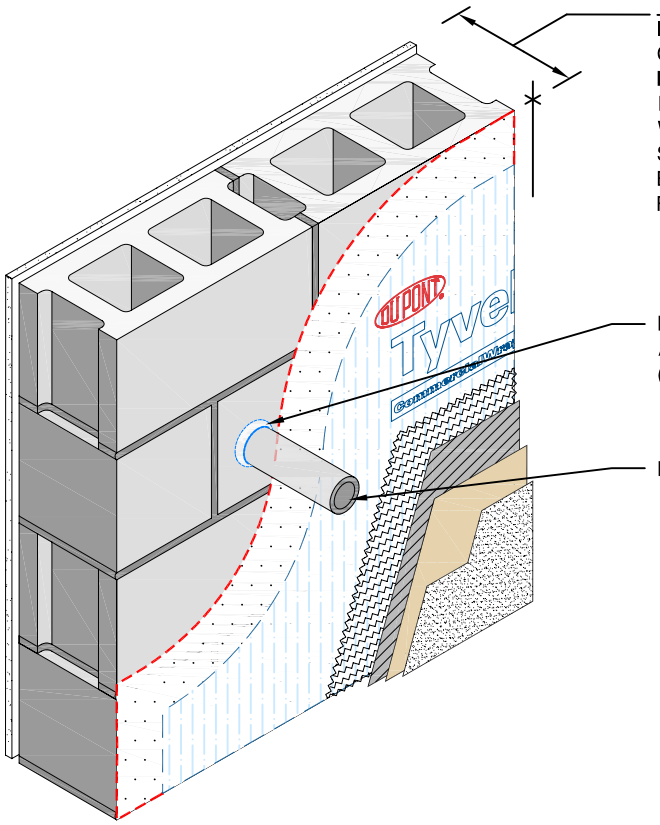

TYPICAL WALL
INTERIOR GYPSUM BOARD
CMU OR CONCRETE WALL
DUPONT™ TYVEK® FLUID APPLIED WB
DUPONT™ TYVEK® COMMERCIALWRAP® D
WIRE LATH
SCRATCH COAT
BROWN COAT
FINISH COAT

DUPONT™ TYVEK® FLUID APPLIED FLASHING AND JOINT COMPOUND
(FILLET BEAD, 1/2" ONTO EACH SURFACE) *

PENETRATION

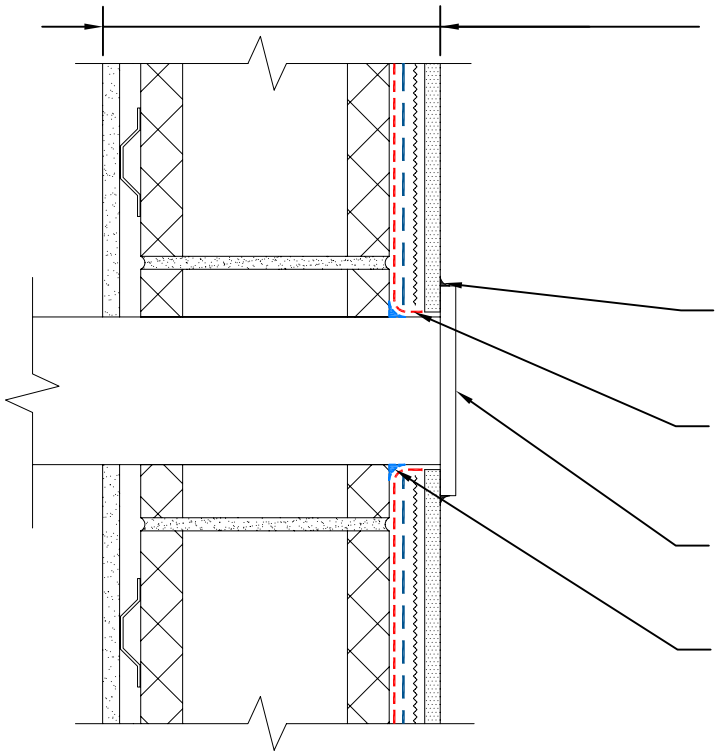

TYPICAL WALL
INTERIOR GYPSUM BOARD
CMU OR CONCRETE WALL
DUPONT™ TYVEK® FLUID APPLIED WB
DUPONT™ TYVEK® COMMERCIALWRAP® D
WIRE LATH
SCRATCH COAT
BROWN COAT
FINISH COAT

SEALANT
BY OTHERS

DUPONT™ TYVEK® FLUID APPLIED WB
OVERLAPPED ONTO PENETRATION

PENETRATION

DUPONT™ TYVEK® FLUID APPLIED FLASHING AND JOINT COMPOUND
(FILLET BEAD, 1/2" ONTO EACH SURFACE) *

NOTE
1) INTERIOR VAPOR RETARDER MAY BE REQUIRED IN SOME REGIONS.
2) THIS INFORMATION IS PROVIDED BY DUPONT AS REFERENCE ONLY; PLEASE CONSULT LOCAL BUILDING CODES, REGULATIONS AND LAWS TO DETERMINE THE APPROPRIATE CONSTRUCTION METHODS AND MATERIALS NEEDED.

* DUPONT™ SEALANT FOR TYVEK® FLUID APPLIED SYSTEM OR DUPONT™ TYVEK® FLUID APPLIED FLASHING AND JOINT COMPOUND MAY BE USED.

SCALE: NOT TO SCALE
REVISION DATE: 9/14/10
DRAWING: FA-S-102

PENETRATION DETAIL

STUCCO / CMU WALL

DUPONT
Tyvek
FLUID APPLIED WB